



100%
RECYCLABLE

iX ION for coffee equipment

Specifically developed for coffee equipment, the iX Ion improves the quality and taste of your coffee and hot beverages whilst protecting your machine from the harmful effects of limescale which, if left untreated, can result in unnecessary kitchen downtime and costly repairs.

It's mix blend of ion exchange resin and granular activated carbon, effectively prevent scale formation on drip coffee and espresso machines whilst providing a consistently exceptional quality and taste for the beverage.

The iX Head* has a variable bypass to allow some untreated water to be dialled back into the water supply, which is essential for better coffee extraction and taste.

iX Head sold separately.

[Click here](#) to view the iX Head Spec Sheet.

Features & Benefits

- Comes in two sizes, 01 and 02
- Made in Britain & 100% Recyclable
- NSF Certified components & certified media
- Simple Installation
- Filter housing is re-usable, and filters are easy and economical to replace.
- No waste - replace & return the insert refill.
- Suitable for coffee service applications
- Variable Bypass, for taste and extraction (for coffee applications)



**VARIABLE
BYPASS**


The iX Ion head has a variable bypass to allow some untreated water to be dialled back into the water supply, which is essential for better coffee extraction and taste.

A truly eco-friendly cartridge water filter.

With our insert refill technology, you can decide whether to quickly change by easily fitting a replacement cartridge or maximise cost saving and reduce environmental impact by just changing the insert.



↓ **SPECIFICATIONS & PART CODES ON NEXT PAGE** ↓

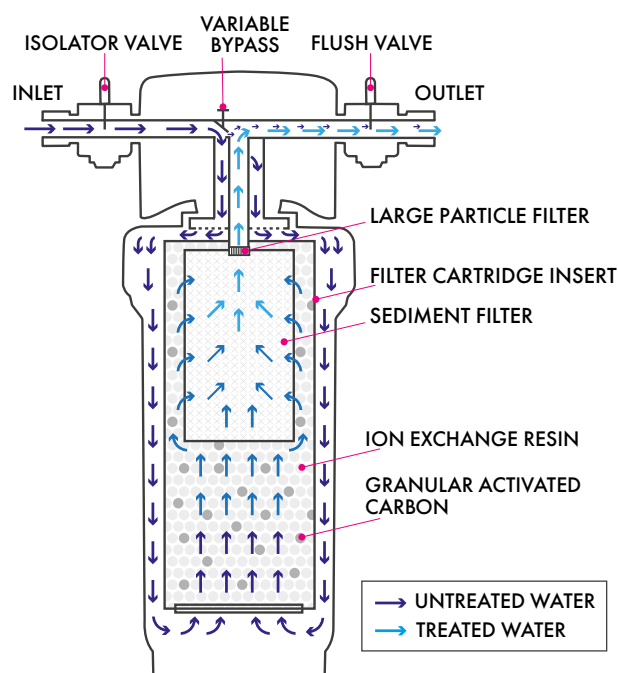

iX Ion Filter Specifications

Flow Rate (Lpm)	7
Min Pressure	1.5 bar
Max Pressure	6 bar
Max Temperature (°C)	35
Connections	3/8" PF or 3/8" BSP
Operating Position	Vertical

This illustration serves as explanation of the filter technology. It is not to scale.

For more information visit:
www.watercare.co.uk/ecofilterion

Part Descriptions & Codes

Description	Dimensions H x W (mm)	Capacity (Ltrs)	Code
IX01 ION EXCHANGE ASSEMBLED CARTRIDGE AND RESIN REFILL (WITHOUT HEAD)	305 x 134	2254	IX01CART-V2
IX02 ION EXCHANGE ASSEMBLED CARTRIDGE AND RESIN REFILL (WITHOUT HEAD)	475 x 134	4112	IX02CART-V2

Description	Dimensions H x W (mm)	Capacity (Ltrs)	Code
IX01 ION REFILL	234 x 94	2254	IX01REFILL-V2
IX02 ION REFILL	404 x 94	4112	IX02REFILL-V2

Capacity based on water hardness of 12° Clarke / 180 PPM – with variable bypass set to 3.

Description	Code
SPANNER	EW1505
FOOTPLATE	EW1704